

ASUS Google Meet hardware kit

Designed to provide comprehensive solutions for office, retail, education and industrial usages in only 0.9L compact size



Smart one-touch video-conferencing solution

- Powered by 10th Generation Intel® Core™ i7-10510U
- All I/O ports are on one side of the device, simplifying setup and cable management
- Supports multiple 4K UHD displays simultaneously
- The ASUS – Google Meet Compute system comes with a magnetic stand and wall mount for easy installation

Easy on your budge

- Its curated set of components work together end-to-end to make engaging HD meetings affordable and headache-free

Easy to use and support


- Each meeting has a unique, easily shareable URL, no dedicated accounts or plugins required
- Unique dial-in number and PIN associated with each meeting
- Tap-to-join dialing in Google Calendar and Google Meet make it easy to join

Easy to install, deploy and manage

- Real-time authorization and central management of meeting participants ensures conferences are secure
- The hardware kit automatically updates the firmware of all the components to guarantee the best video experience

ASUS Google Meet hardware kit

Over view:

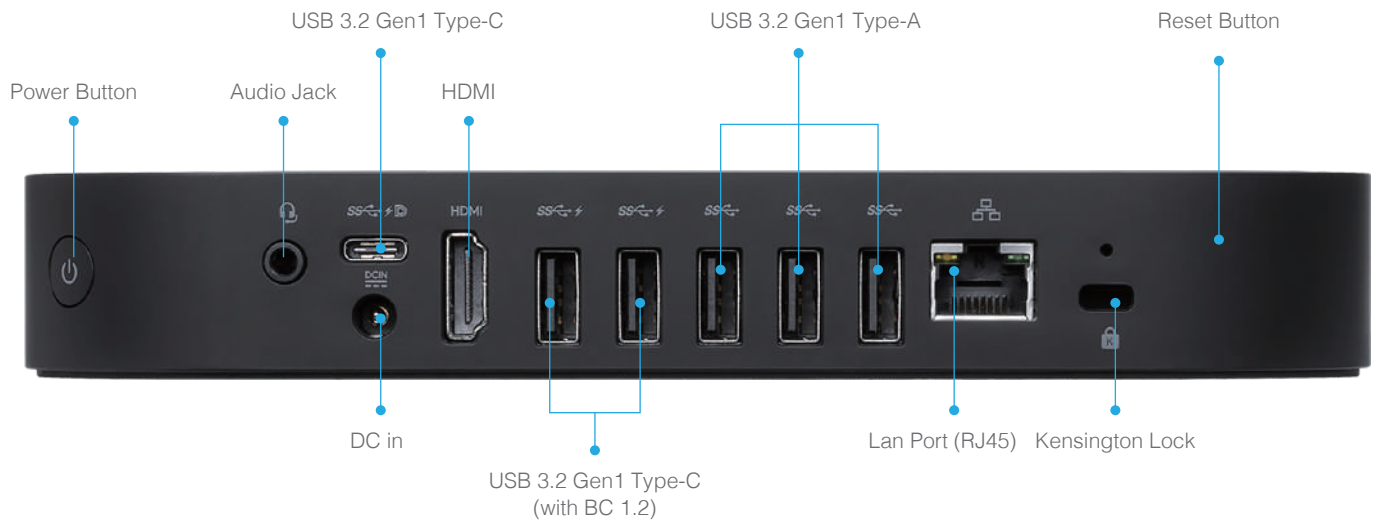

Accessories list:



- Remote Control
- Power Cord
- AC Adapter (80cm)
- Quick Start Guide & Warranty Card
- VESA Mount Kit (Optional)

Feature table:

Power	
PD input	Y
Extended Power Button	N
BIOS	
AC Power loss	Y
HDMI-CEC	N
CrashFree	Y
EZ Flash	Y
BIOS Customization	Y
PXE/WOL	Y
USB Single Port Control	Y

Security	
fTPM 2.0	Y
dTPM 2.0	optional
Kensington lock	Y
Pad-lock	N
Chassis Intrusion	N
Reliability	
24/7 Durability Test	Y
Military-grade Durability	N
Anti-Surge	Y
Fanless	N

Remote	
ASUS Control Center	N
Watchdog timer	N
ASUS Cooperate Stable Model	N
MyLogo	Y
MyASUS / CSM	
Smart Fan Control	N
AI Noise Cancelation	N
Wi-Fi Smart Connect	N

ASUS Google Meet hardware kit

Model		ASUS Google Meet hardware kit
OS		ChromeOS for Meet
CPU		Intel® Core™ i7-10510U
Chipset		Integrated
Graphics		Integrated - Intel® UHD Graphics 630/610
Memory		2 x DDR4 SO-DIMM slots for DDR4 2666 MHz, 2 x 2GB - 2 x 4GB (total)
Storage		1 x M.2 2280 PCIe Gen3 slot for 128GB (NVMe or SATA)
Wireless Network		Intel® Wi-Fi 6 and Bluetooth 5.2
LAN		Intel® LAN, 10/100/1000 Mbps Supports Wake on LAN / PXE / Auto Power on / RTC Wake
Interface	Front I/O	N/A
	Side I/O	N/A
	Rear I/O	1 x USB 3.2 Gen1 Type-C (5 Gbps, support DP1.4/PD in) 3 x USB 3.2 Gen1 (5 Gbps) 1 x USB 3.2 Gen1 (5 Gbps, support BC1.2) 1 x HDMI 2.0 Port 1 x Intel LAN (RJ45) 1 x Kensington Lock 1 x DC-in 1 x Recovery butto
TPM		fTPM 2.0 or TPM 2.0 chip (Optional)
BIOS Function		64 Mb Flash ROM, UEFI AMI BIOS, PnP, DMI2.0, WfM2.0, SM BIOS 2.8, ACPI 5.0, Multi-language BIOS, ASUS EZ Flash 3, ASUS CrashFree BIOS 3, My Favorites, Quick Note and ASUS DRAM SPD (Serial Presence Detect) memory information
Power Supply		19Vdc, 4.74A, 90W
Physical	Dimension	198 x 123 x 29.5 mm (0.72L)
	Weight	0.67 kg
Temperature	Operating	0°C~50°C
	Storage	-40°C~85°C
Humidity		0%~95% Relative Humidity
Acoustic	Idle mode	<25 dBA
	Full loading	<35 dBA * Test results will vary slightly depending on the HDD/SSD SKU selected by customer
Certificates		BSMI / CB / CE / FCC / UL / CCC / Energy Star / C-Tick / WiFi / RF / VCCI